


LINEA 1 – RECTA 1 T&L

V2.8


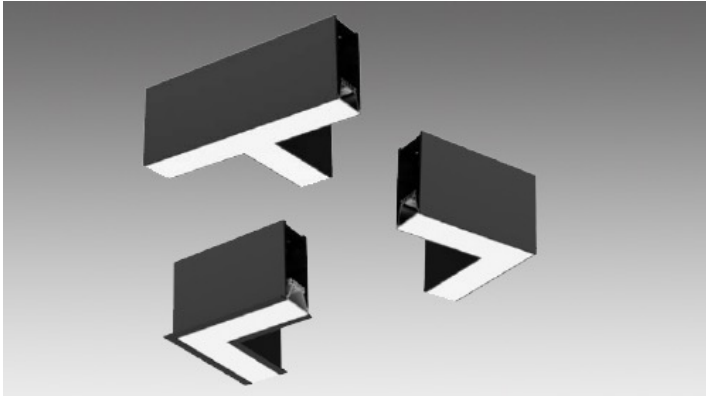


TECHNICAL SPECIFICATION

Minimum profile downlight with metal conduit and driver included for easy remodel or new construction installation.

SPECIFICATIONS

- Construction: Die-cast Aluminum
- Optics: PMMA Lens
- Power: 12W/22W Input: 120VAC
- CCT: 3000K
- CRI: 90+
- LED Source: 344lm-523lm
- Beam Angle: 100°
- Dimming Options: 0-10V
- Colors: Black/ White
- Standards: ETL, cETL, Damp Location Listed

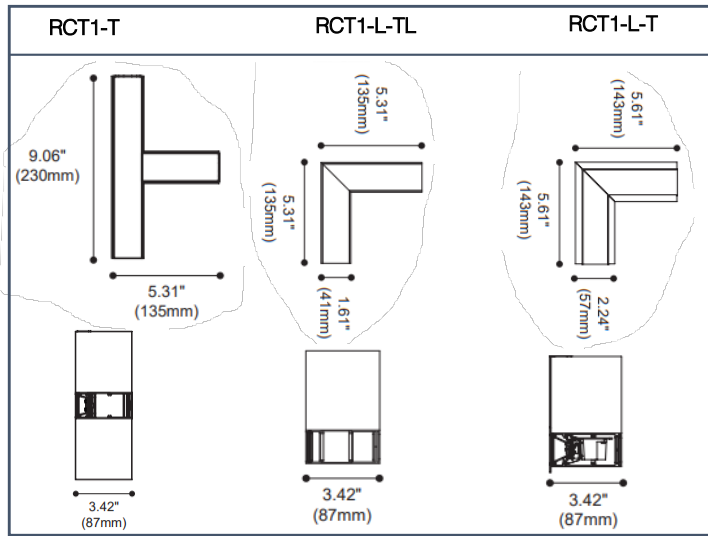

FINISHES

- Fixture: Black White

OPTICS




100°

CCT

- 2700K
- 3000K
- 3500K
- 4000K

DISTRIBUTION



1. Trim Type

RCT1-T = Recta 1 Trimless (523lm)

RCT1-L-TL = Recta 1 L Trimless (344lm)

RCT1-L-T = Recta 1 L (344lm)

2. Color Temperature

27 = 2700K

30 = 3000K

35 = 3500K

40 = 4000K

3. Optic

NS = 100°


4. Finish

W = White Body

B = Black Body

5. Dimming

0-10V = BLANK

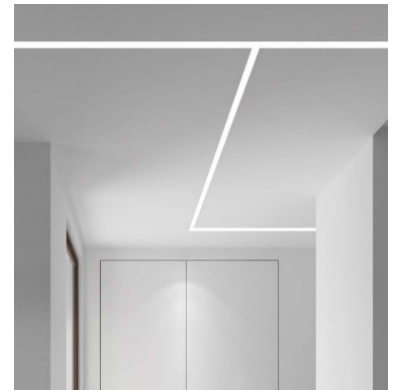

Example: **RCT1-T-30-NS-B** = RECTA 1 T - 3000K – 100° Optic – Black Body – 0-10V Dimming