



TECHNICAL SPECIFICATION

A powerful small spot that clips mechanically into LINEA 1 system, Can be mounted on ceiling or wall vertically or horizontally


SPECIFICATIONS

- Construction: Die-cast Aluminum
- Optics: PMMA Lens
- Power: 15W/30W (Duo)
- Input: 120 VAC
- CCT: 2700K, 3000K, 3500K, 4000K
- CRI: 90+
- LED Source: 1172lm - 2376lm (Duo)
- Beam Angle: 20°/25°/36°
- Dimming Options: 0-10V
- Colors: Black/ White
- Reflector: Black/ White/ Copper
- Standards: ETL, cETL, Damp Location Listed




FINISHES

- Fixture: Black White
- Reflector: Black White Copper

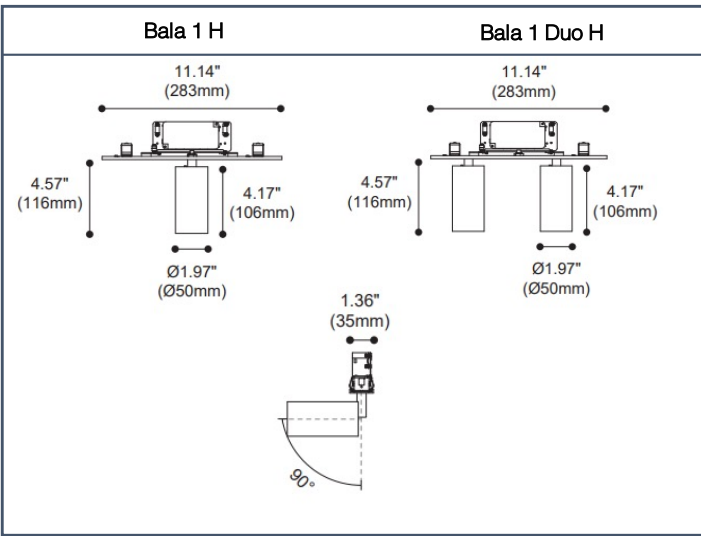


OPTICS

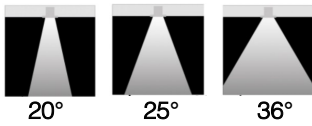

CCT



DISTRIBUTION

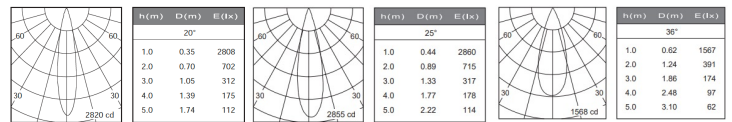

1. Trim Type

- BLA1-HO =** Bala 1 High Spot, Adjustable (1172lm)
- BLA1-DUO-HO =** Bala 1 Duo High Spot, Adjustable (2376lm)

2. Color Temperature

- 27 =** 2700K
- 30 =** 3000K
- 35 =** 3500K
- 40 =** 4000K

3. Optic

- NS =** 20°
- S =** 25°
- M =** 36°

4. Finish

- WW =** White Body / White Reflector
- BB =** Black Body / Black Reflector
- WC =** White Body / Copper Reflector
- BC =** Black Body / Copper Reflector

5. Dimming

- 0-10V =** BLANK

Accessories



Example: **BLA1-HO-30-NS-BB** = BALA 1 High Spot - 3000K – 20° Optic – Black Body/ Black Reflector – 0-10V Dimming